

## TECHNICAL DATA SHEET

### CS10 Brushable Seam Sealer

Date: 15-06-2017

Page: 1


**Description:**

CS10 Sealant based on synthetic rubber and resins in organic solvents

**Areas of Application:** sealant for car repair, applicable by brush or spreader. It is especially recommended for protection of welding, joints and coating of metal parts (car frame, wheel arches, car bonnet and boots). It is thixotropic allowing no sagging when vertically applied and it doesn't string during application. Once cured, the film is flexible. It cannot be over painted and has a very good adhesion on raw or painted metals.

**TECHNICAL DATA**

Appearance	Thixotropic paste
Colour	Light Grey
Density at 20 ° C	1.20 ± 0.02
Conventional solids content (EN 827)	70 ± 2 %
Application temperature	5 to 35 ° C
Specific data	Skin formation time at 23 ° C : 35 ± 5 min Full drying time at 25 ° C and 50 % HR:24 (1mm thick film)

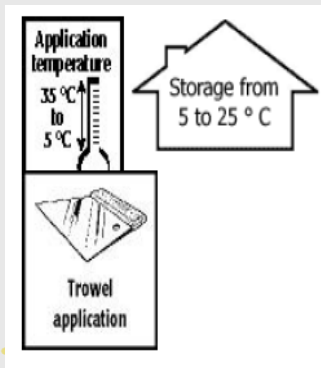

**INSTRUCTIONS FOR USE**

**Substrates preparation:**

The substrates to be assembled must be dry, dust free and not have any traces of grease or other contaminants that could adversely affect the performance.

If the substrates need to be cleaned, methylethylketone (MEK) or acetone may be used. Solvents must comply with local regulations. Check the compatibility of the solvent used with the substrates.

If necessary, rub down metal surfaces beforehand, then clean them again.

When using solvents, extinguish all sources of ignition and carefully follow the safety and handling instructions given by the manufacturer.

Adhesive and substrates have to be between 5 and 35 ° C

**Application:**

Apply evenly with a brush or a spreader.

Let dry for at least 24 h for each 2 mm thickness before over painting.

**Consumption:**

300 TO 600 G/M<sup>2</sup>

**Storage and Shelf Life:**

12 months between 5 and 25 ° C in closed original packaging.

**Packaging:**

1 litre boxes

**Safety:**

Highly flammable and harmful.

# TECHNICAL DATA SHEET

## CS10 Brushable Seam Sealer

Date: 15-06-2017

Page: 2

Read material safety data sheet before use.

The technical data contained herein is based on our present knowledge and we experience and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings that result from technological changes or research between the date of issue of this document and the date the product is acquired.

Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product.

Our guarantee applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions.

The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.